

# PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2001-131229

(43)Date of publication of application : 15.05.2001

(51)Int.Cl.

C08F 8/42  
C08F236/10  
C08K 3/36  
C08L 9/06  
C08L 21/00

(21)Application number : 11-309884

(71)Applicant : BRIDGESTONE CORP

(22)Date of filing : 29.10.1999


(72)Inventor : MORITA KOICHI

(54) POLYMER, METHOD FOR PRODUCTION THEREOF, AND RUBBER COMPOSITION PREPARED BY USING SAME

(57)Abstract:

PROBLEM TO BE SOLVED: To provide a modified diene polymer which can be well reinforced and in which a filler can be well dispersed regardless of the kind of filler contained, a method for producing the same, and a rubber composition having good fracture characteristics, abrasion resistance, and low heat build-up.

SOLUTION: This polymer has an alkoxysilyl group at the molecular end and a mol.wt. distribution of 1.2 or lower.

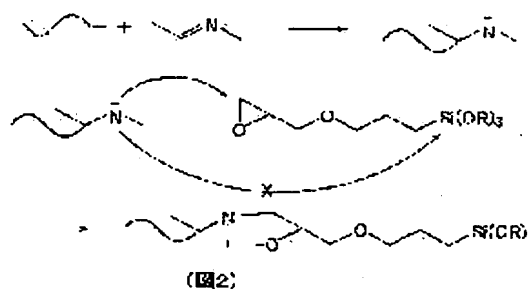

## LEGAL STATUS

[Date of request for examination] 16.06.2006

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's  
decision of rejection]

[Date of requesting appeal against  
examiner's decision of rejection]

[Date of extinction of right]